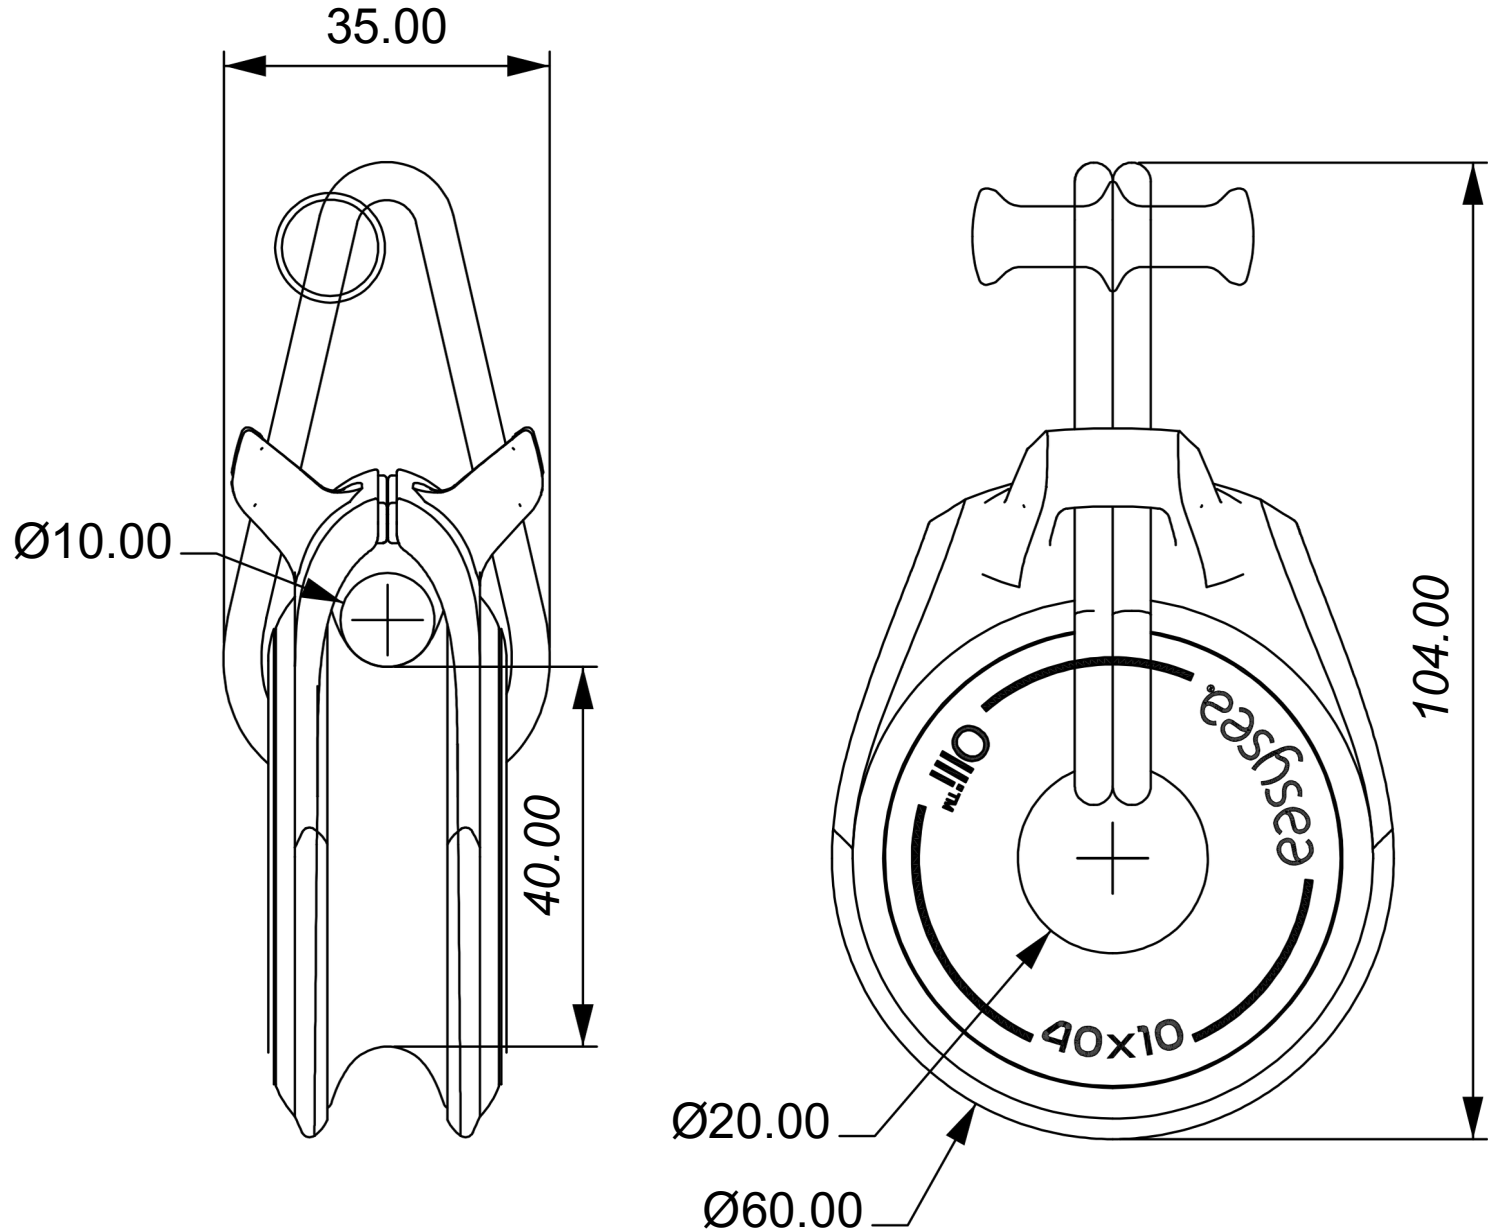
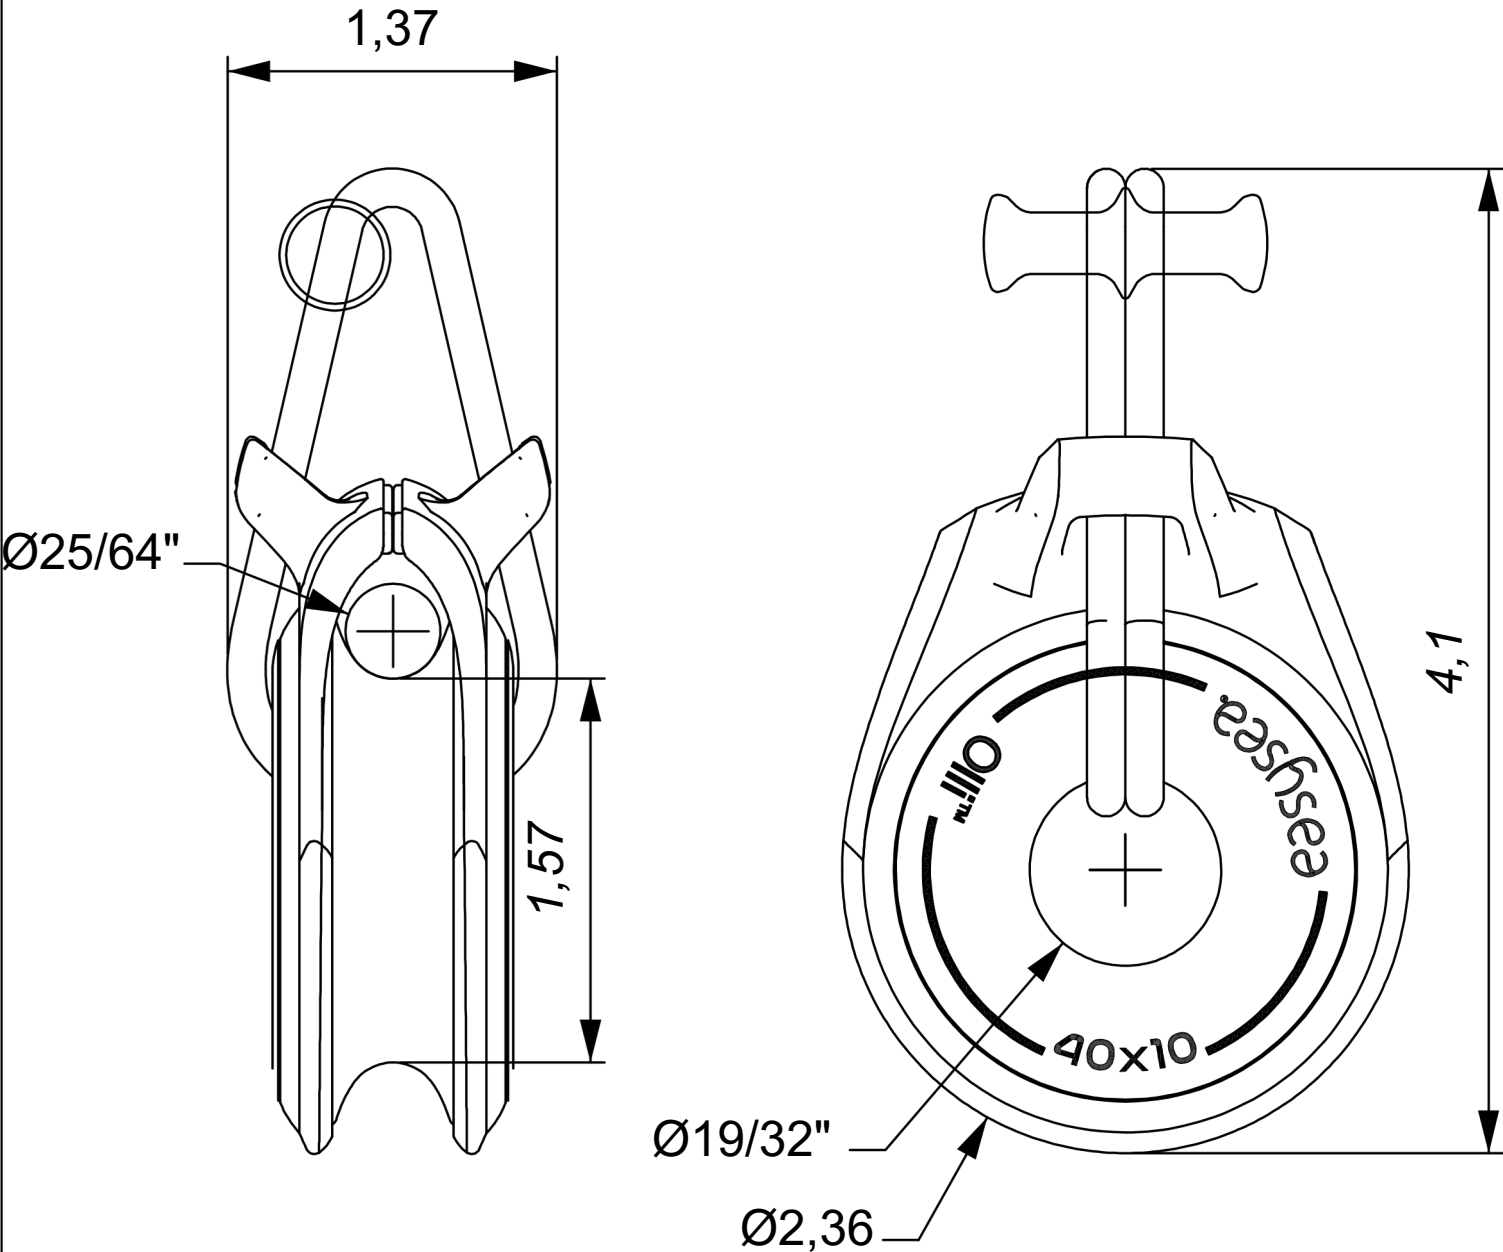
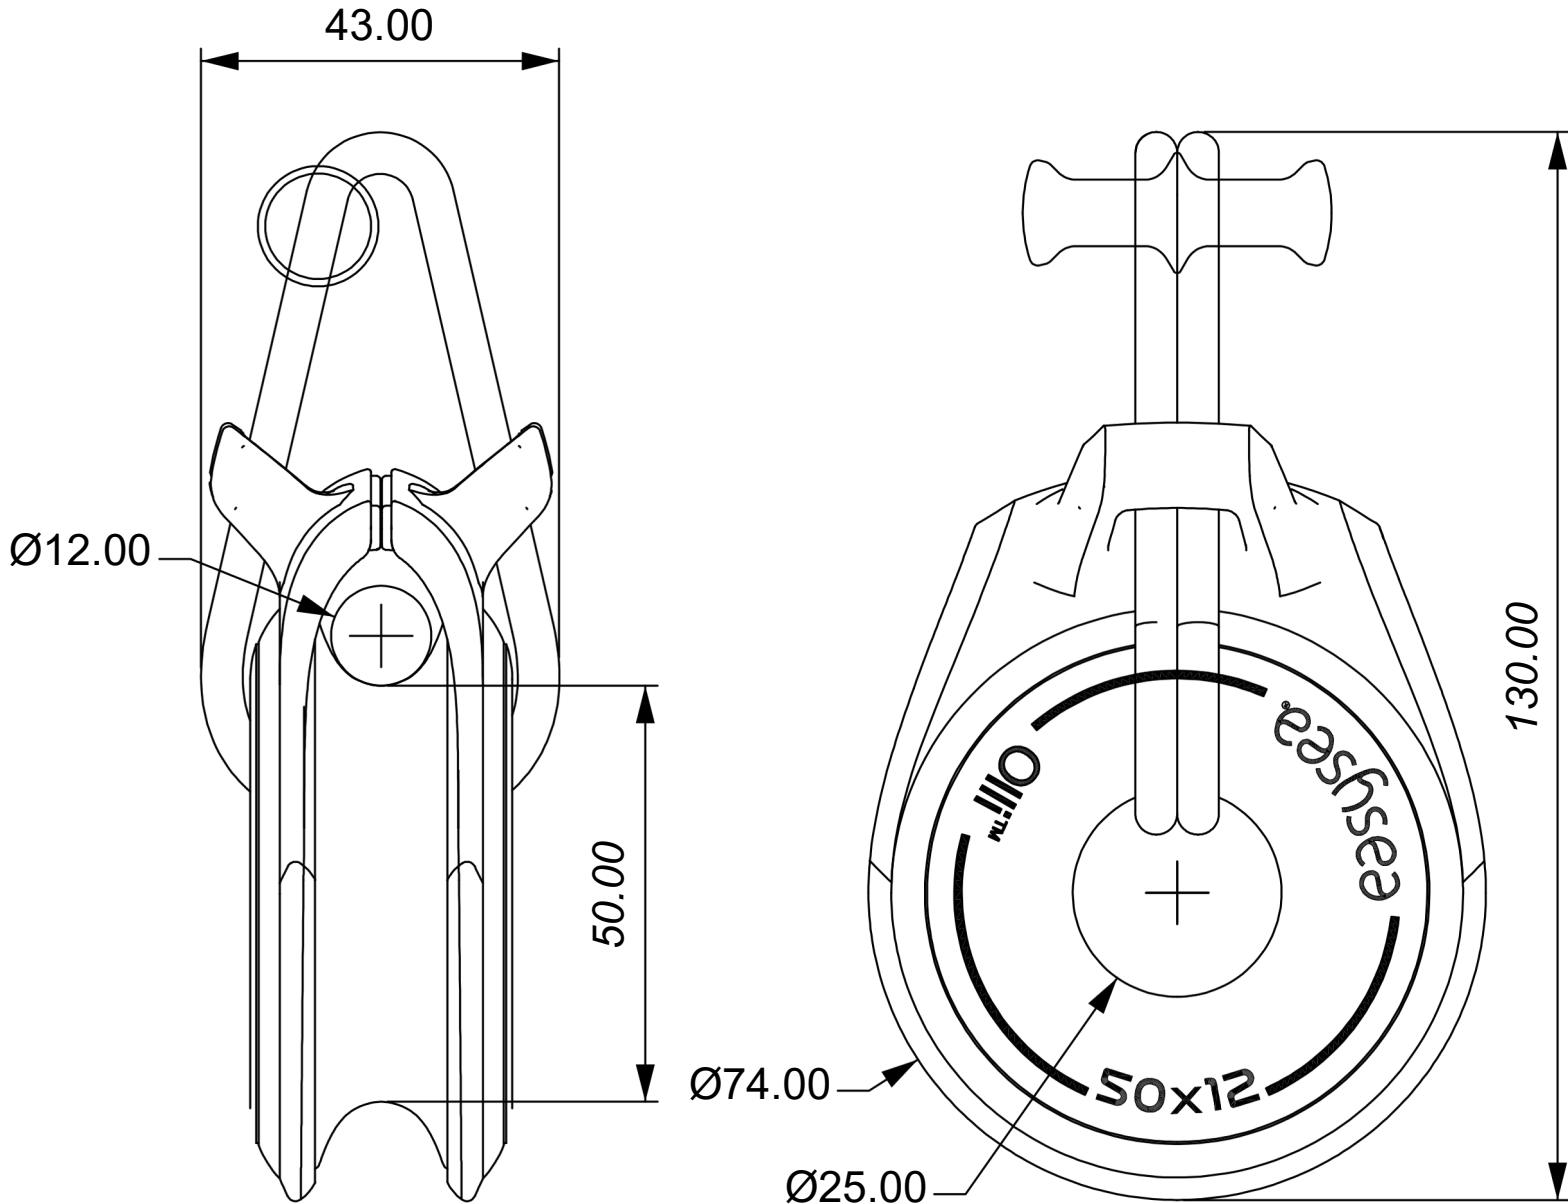
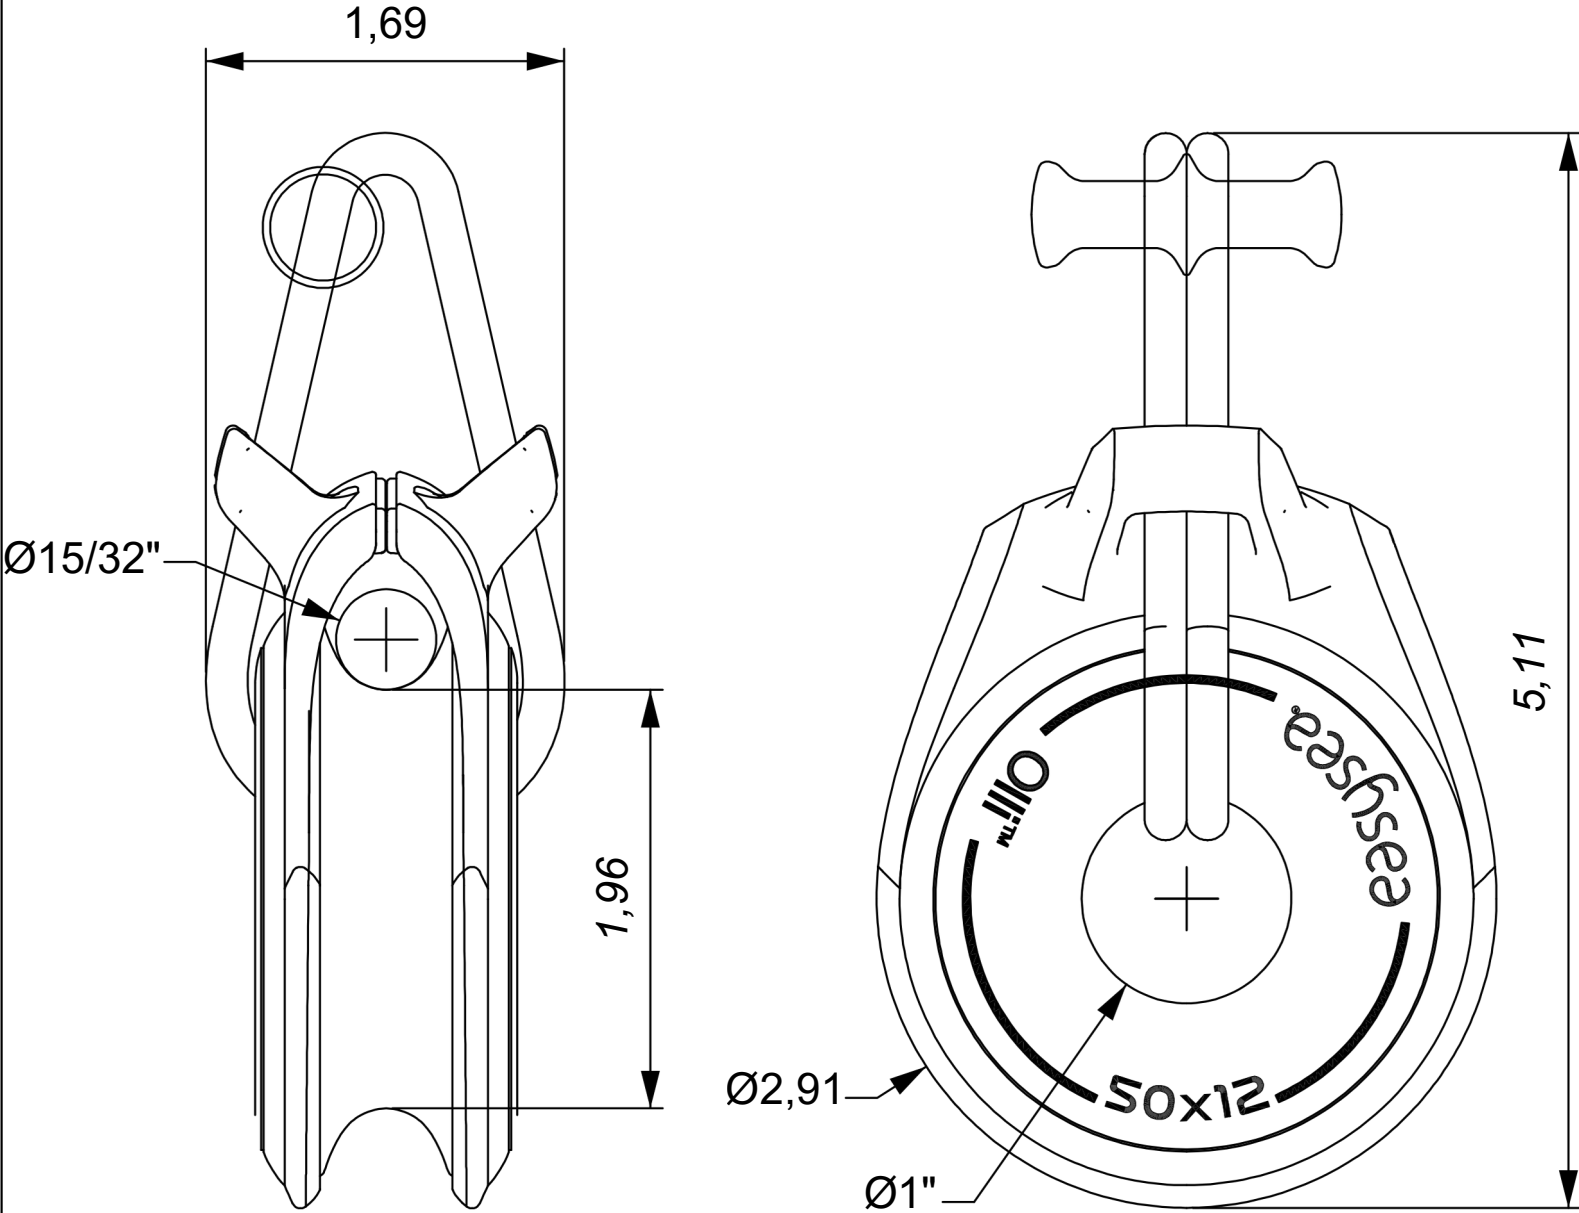
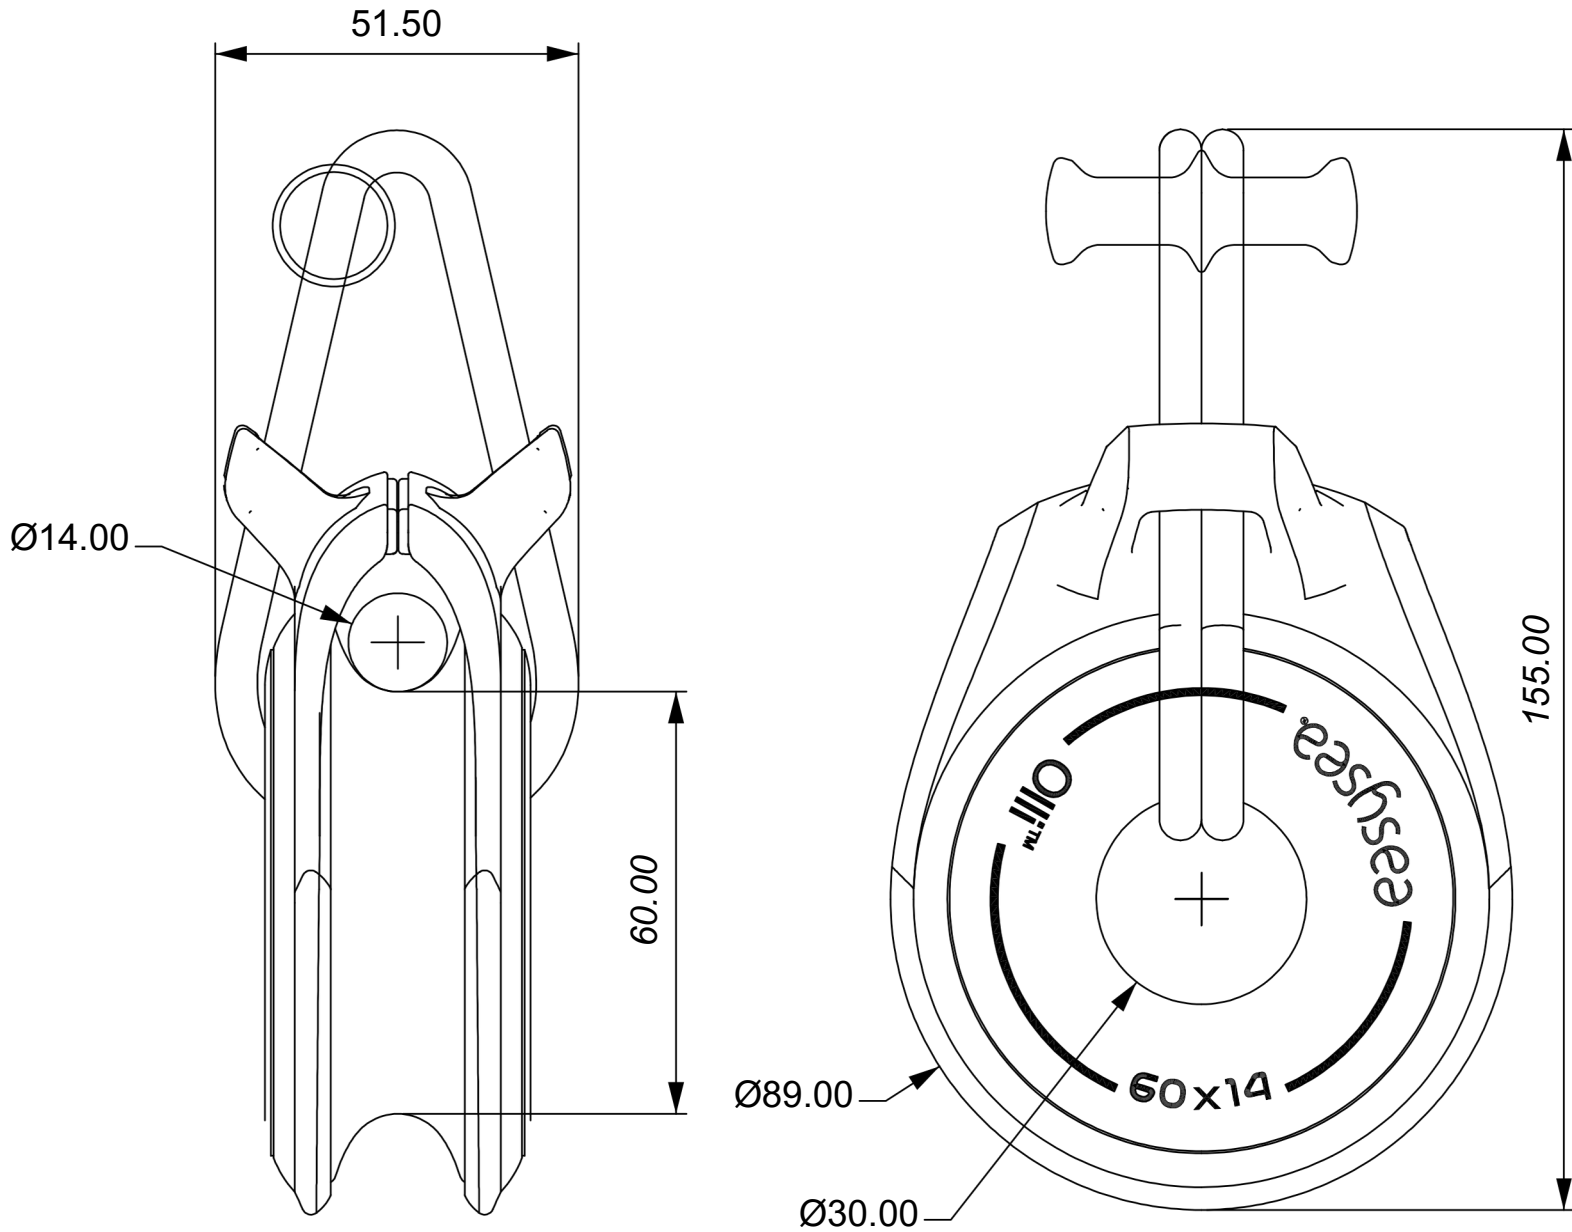



TECHNICAL CHARACTERISTICS		
Olli Block S aluminum	ATTRIBUTE	VALUE
	MATERIAL RING	Aluminum 6082
	TREATMENT	Hard black anodized
	COVER	Derlin ST100
	LINE Ø	max 10 mm
	C (CENTER HOLE Ø)	20 mm
	T (THICKNESS)	35 mm
	D (DIAMETER)	40 mm
	WEIGHT	94 g
	MAX WORKING LOAD	570 kg
	BREAKING LOAD	1140 kg

TECHNICAL CHARACTERISTICS		
Olli Block S aluminum	ATTRIBUTE	VALUE
	MATERIAL RING	Aluminum 6082
	TREATMENT	Hard black anodized
	COVER	Derlin ST100
	LINE Ø	max 25/64"
	C (CENTER HOLE Ø)	19/32"
	T (THICKNESS)	1,37 in
	D (DIAMETER)	1,57 in
	WEIGHT	0,20 lb
	MAX WORKING LOAD	1256 lb
	BREAKING LOAD	2513 lb

TECHNICAL CHARACTERISTICS		
Olli Block M aluminum	ATTRIBUTE	VALUE
	MATERIAL RING	Aluminum 6082
	TREATMENT	Hard black anodized
	COVER	Derlin ST100
	LINE Ø	max 12 mm
	C (CENTER HOLE Ø)	25 mm
	T (THICKNESS)	43 mm
	D (DIAMETER)	50 mm
	WEIGHT	181 g
	MAX WORKING LOAD	900 kg
	BREAKING LOAD	1800 kg

TECHNICAL CHARACTERISTICS		
Olli Block M aluminum	ATTRIBUTE	VALUE
	MATERIAL RING	Aluminum 6082
	TREATMENT	Hard black anodized
	COVER	Derlin ST100
	LINE Ø	max 15/32"
	C (CENTER HOLE Ø)	1"
	T (THICKNESS)	1,69 in
	D (DIAMETER)	1,96 in
	WEIGHT	0,40 lb
	MAX WORKING LOAD	1984 lb
	BREAKING LOAD	3968 lb

TECHNICAL CHARACTERISTICS		
Olli Block L aluminum	ATTRIBUTE	VALUE
	MATERIAL RING	Aluminum 6082
	TREATMENT	Hard black anodized
	COVER	Derlin ST100
	LINE Ø	max 14 mm
	C (CENTER HOLE Ø)	30 mm
	T (THICKNESS)	51,50 mm
	D (DIAMETER)	60 mm
	WEIGHT	260 g
	MAX WORKING LOAD	1700 kg
	BREAKING LOAD	3400 kg

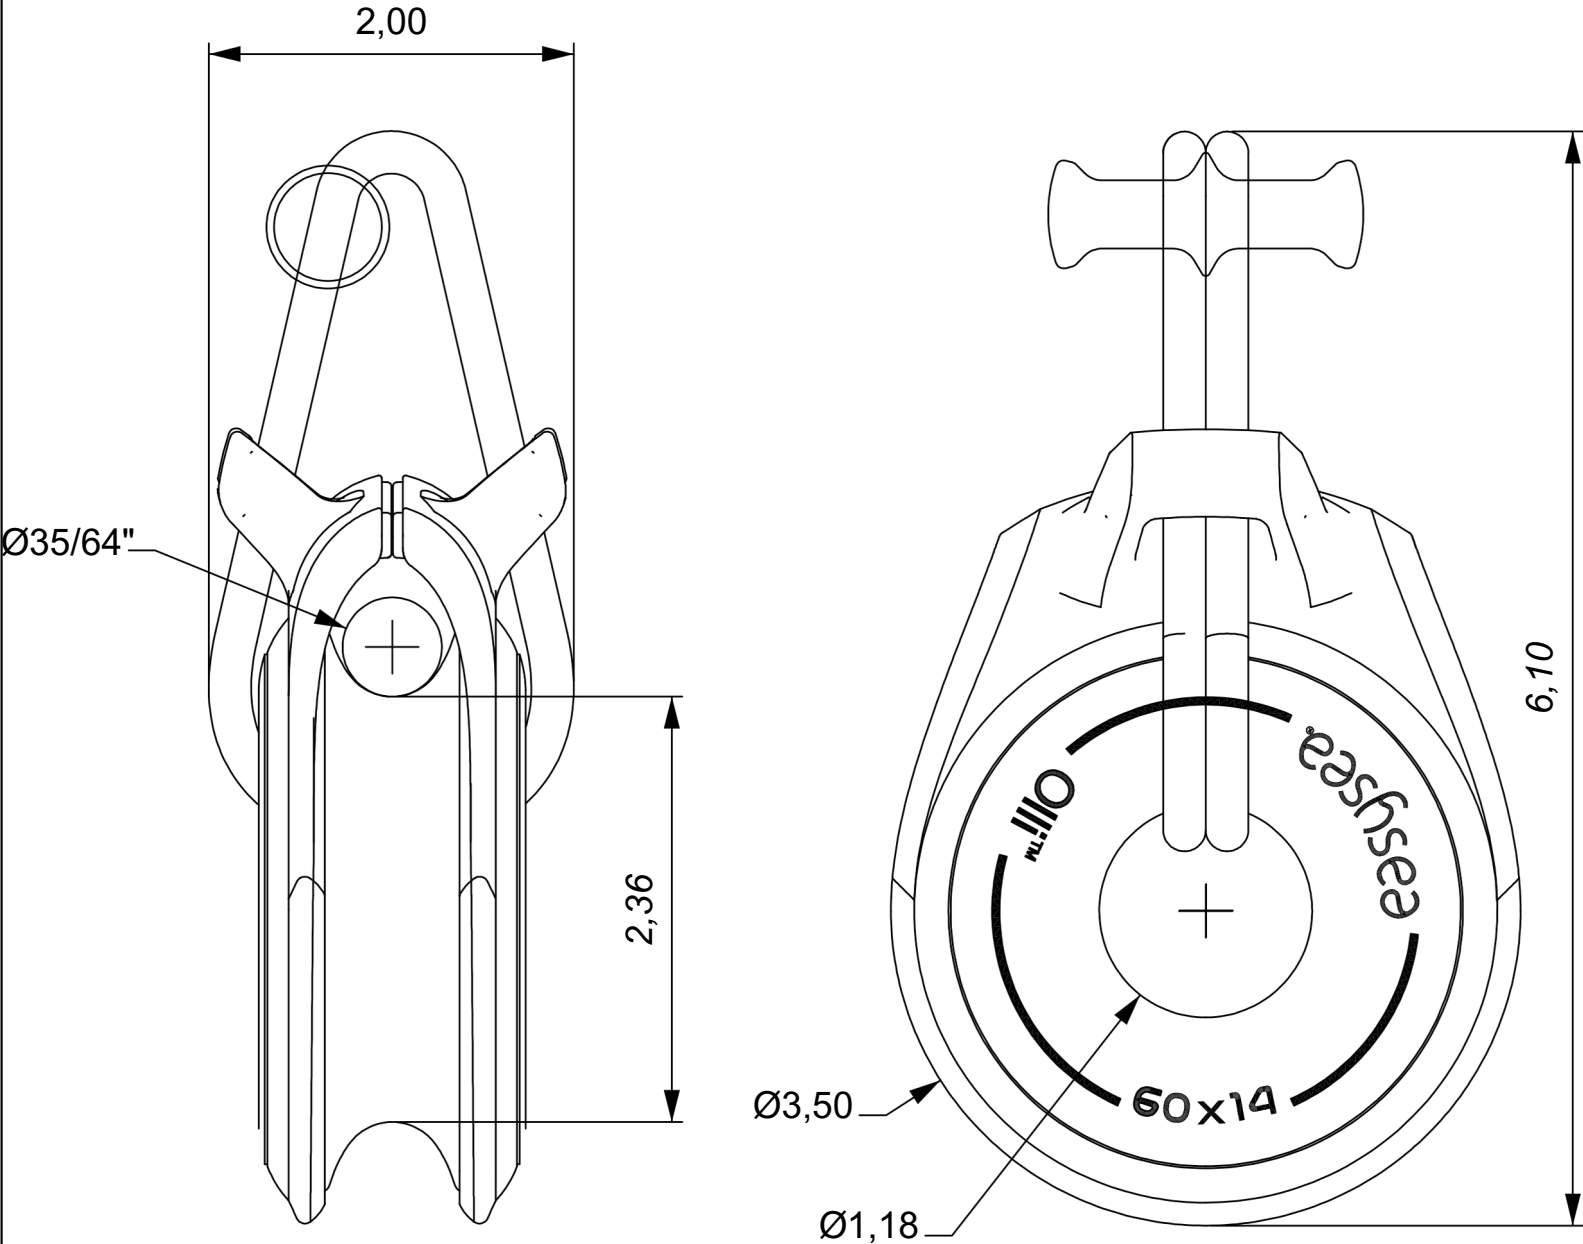TECHNICAL CHARACTERISTICS		
Olli Block L aluminum	ATTRIBUTE	VALUE
	MATERIAL RING	Aluminum 6082
	TREATMENT	Hard black anodized
	COVER	Derlin ST100
	LINE Ø	max 35/64"
	C (CENTER HOLE Ø)	1,18 in
	T (THICKNESS)	2 in
	D (DIAMETER)	2,36 in
	WEIGHT	0,57 lb
	MAX WORKING LOAD	3747 lb
	BREAKING LOAD	7495 lb