


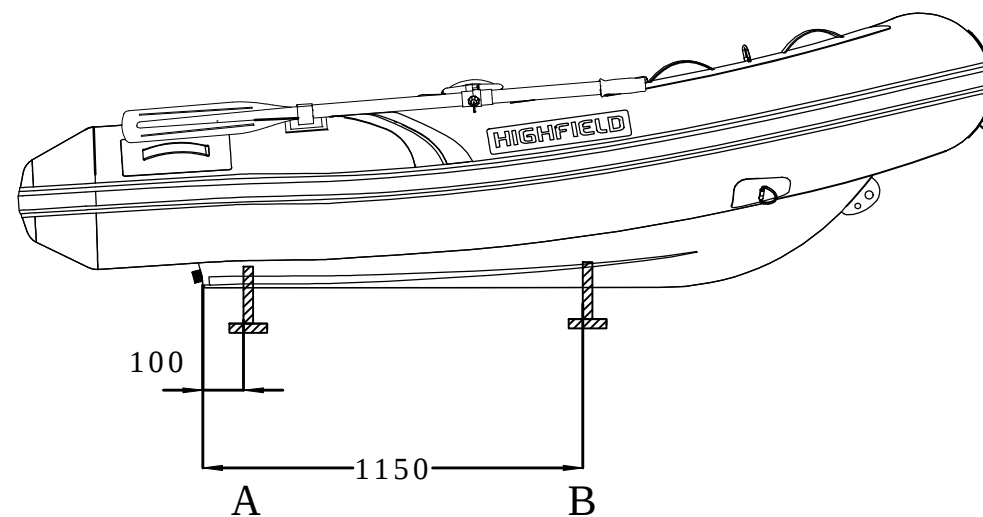


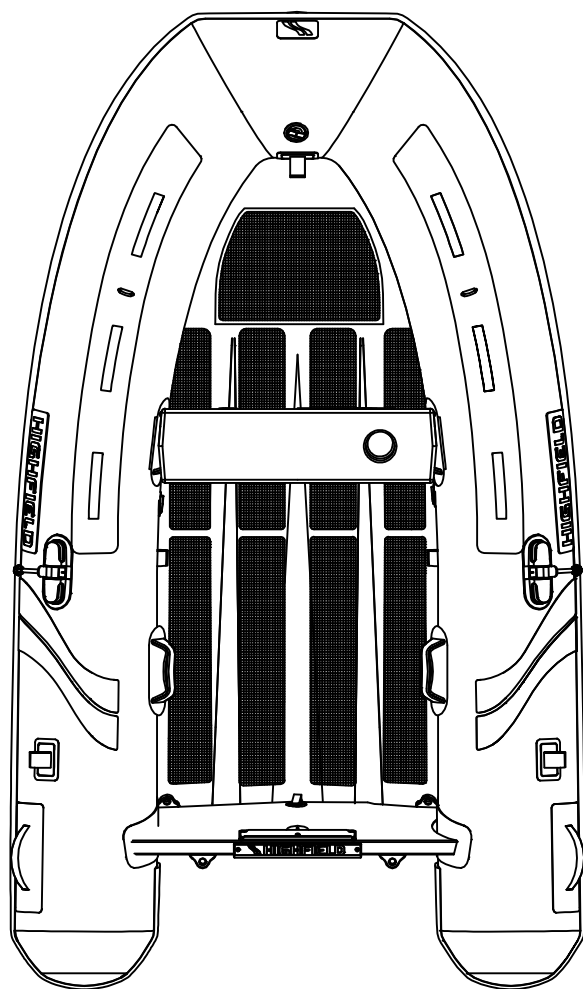


LONGITUDINAL PROFILE

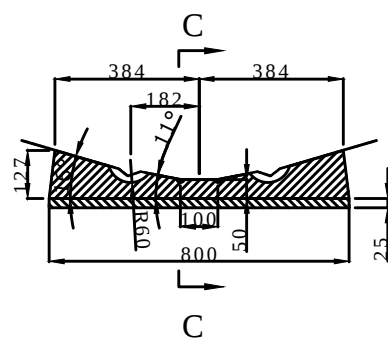

TRANSVERSAL SECTION "A"

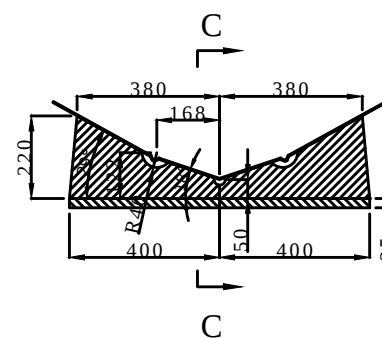

TRANSVERSAL SECTION "B"





TRANSVERSAL SECTION "C"


	UL260 CHOCK		DWN: TYJ
			APPROVED: LXL
info@highfieldboats.com	DWG:	SCALE:	DATE: 2019-09-17
(C) Copyright reserved. No unauthorized use allowed. All intellect - ideas - concepts remain the property of Highfield Boats			

ULTRALITE 260

SPECIFICATIONS

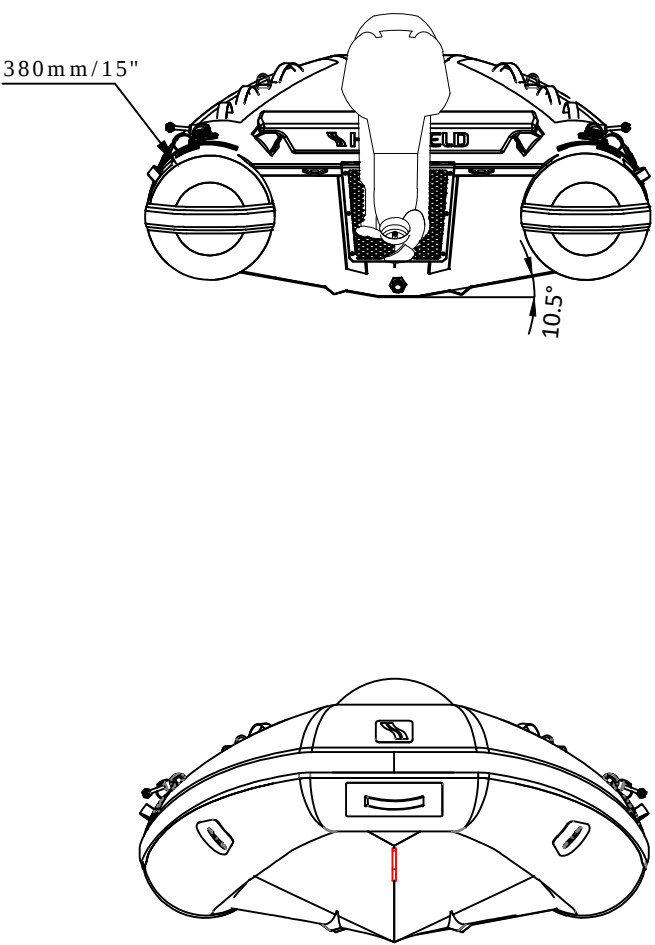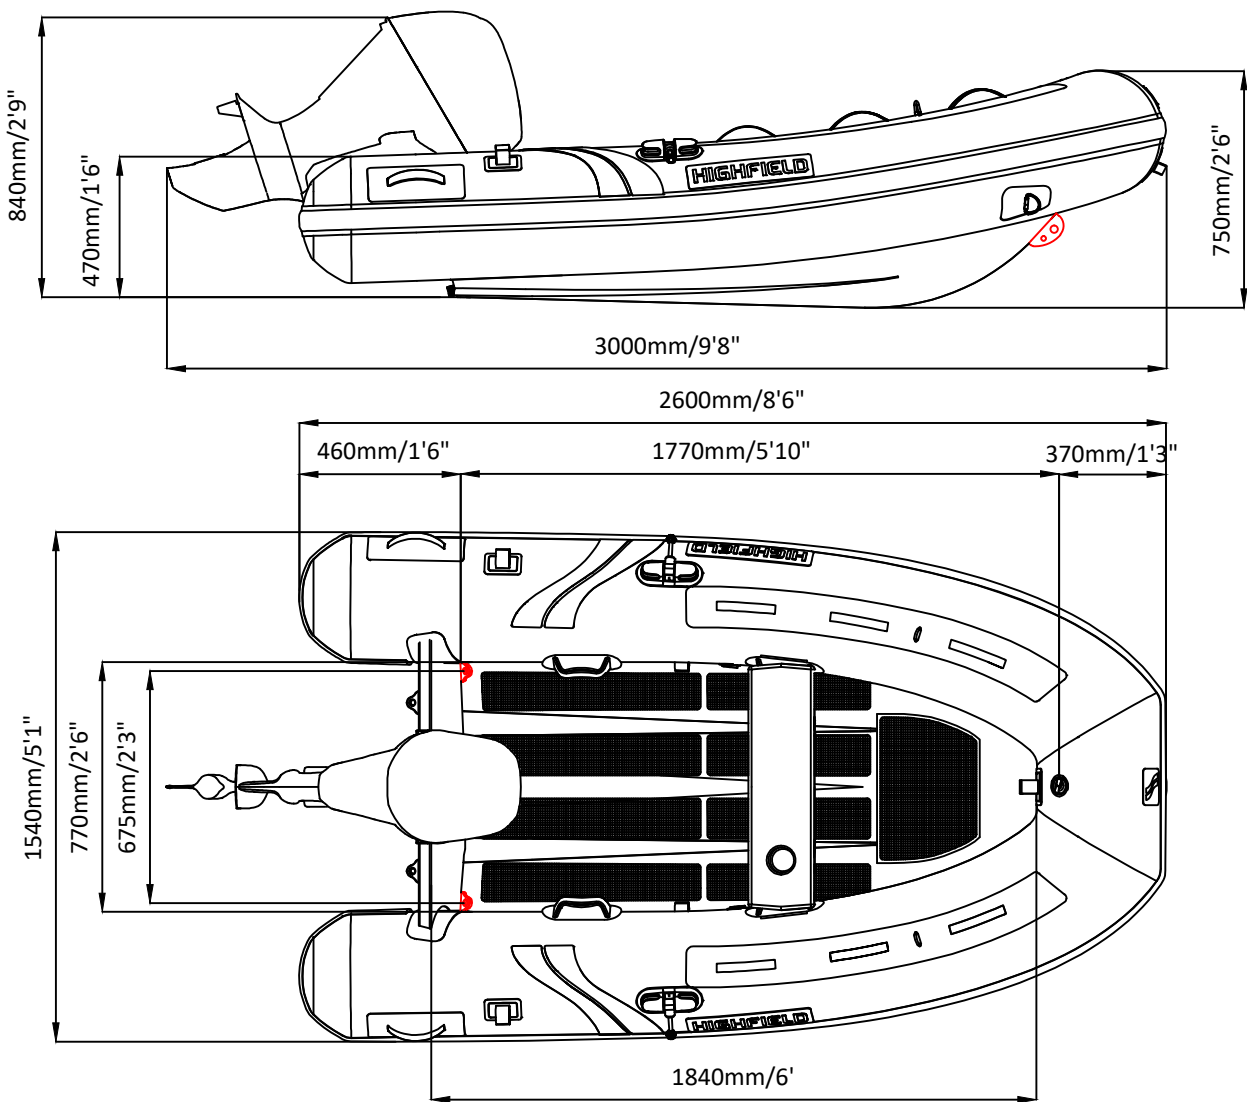



SPECIFICATIONS AND MAXIMUM CAPACITIES (Subject to change without notice.Tolerances:Dimensions ±2.5% Weight ±5%)

MODEL	ISO 6185 PART	ISO 6185					 Outboard Engine			Molded seat		Oars		/		Fuel tank Capacity		 Wet Weight (Approximate) 6HP (4.48KW) +Fuel		AIR CHAMBERS							
			KG	LB	#	KG	LB	Shaft	Max power		Max weight		KG	LB	KG	LB	/	/	L		GAL	KG	LB	PSI	BAR		
									KW	HP	KG	LB															
UL260	2	C	340	750	3+1	263	579	S	4.48	6	40.9	90	35	77	2.5	5.5	1.5	3.3	/	/	/	/	94.9	209	3	3.63	0.25


Weight: boat only.

ULTRALITE 260LT

SPECIFICATIONS

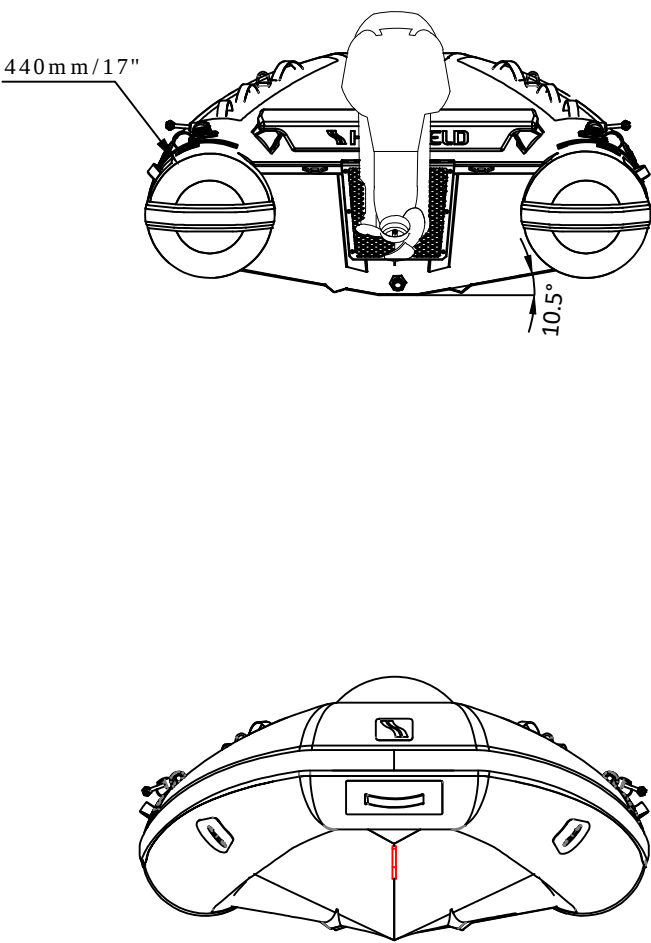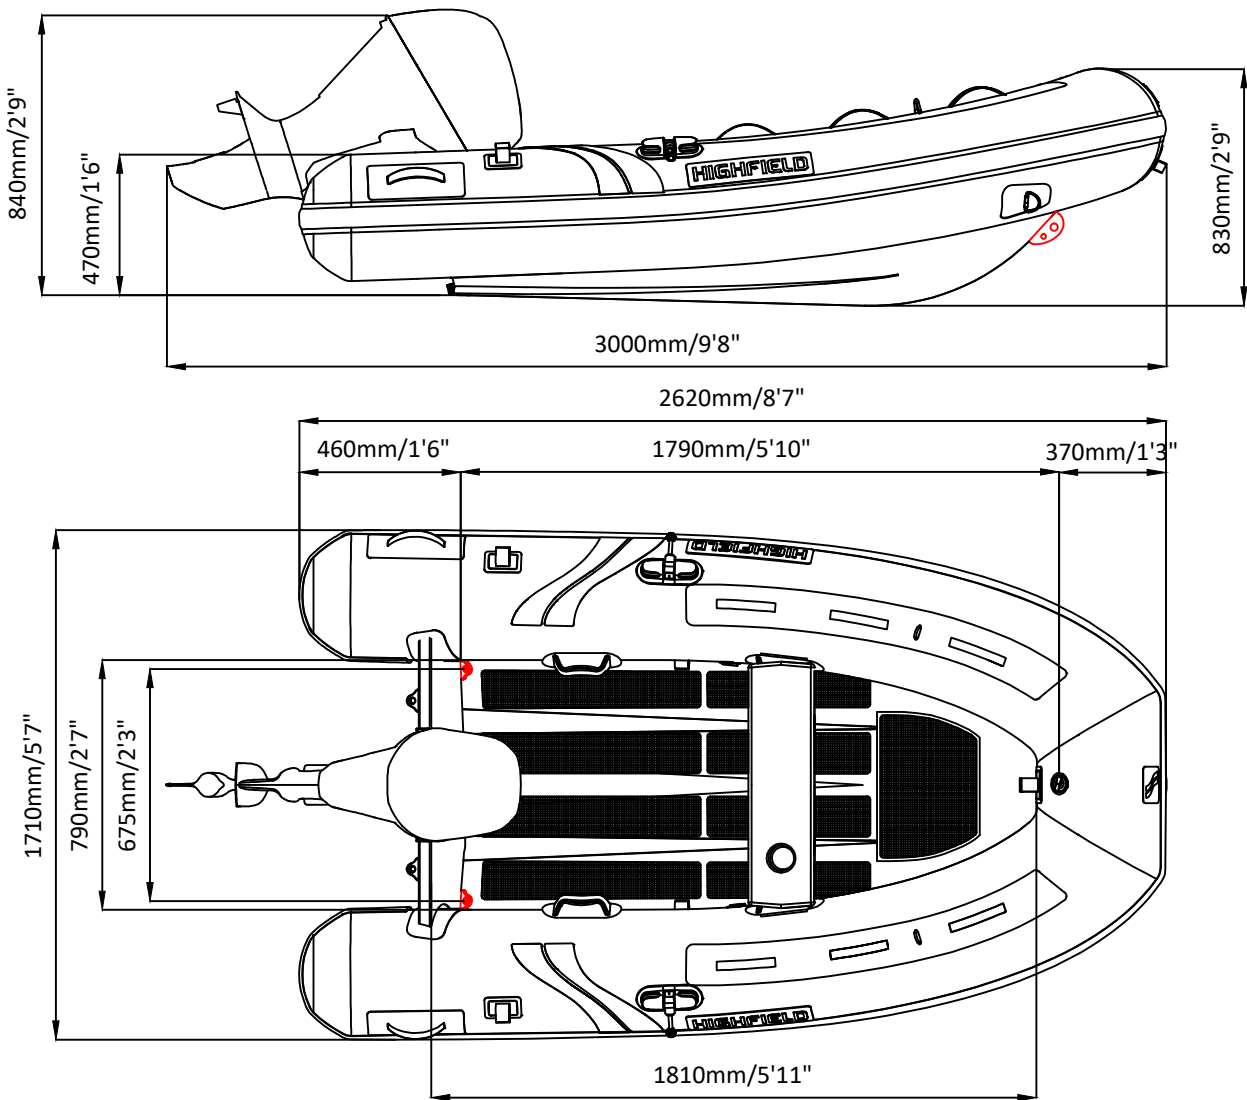

SPECIFICATIONS AND MAXIMUM CAPACITIES (Subject to change without notice.Tolerances:Dimensions ±2.5% Weight ±5%)

MODEL	ISO 6185 PART	ISO 6185						 Outboard Engine						Molded seat		Oars		/		Fuel tank Capacity		Wet Weight (Approximate) 10HP (7.46KW) +Fuel 		AIR CHAMBERS			
			KG	LB	#	KG	LB	Shaft	Max power		Max weight		KG	LB	KG	LB	KG	LB	/	/	L	GAL	KG		LB	PSI	BAR
									KW	HP	KG	LB															
UL260LT	2	C	358	788	3+1	263	579	S	7.46	10	60	132	37	80	2.5	5.5	1.5	3.3	/	/	/	/	116	256	3	3.63	0.25

Weight: boat only.